

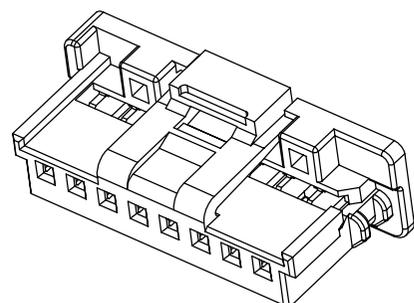
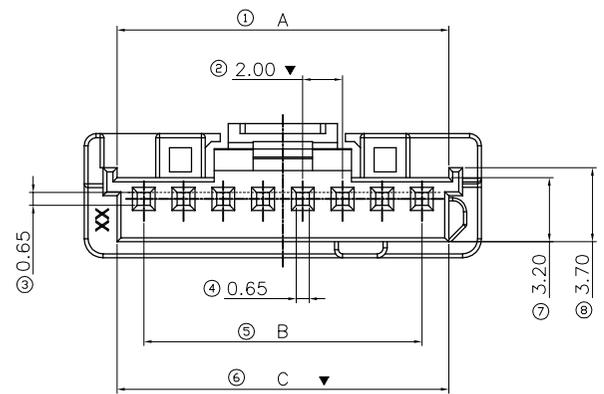
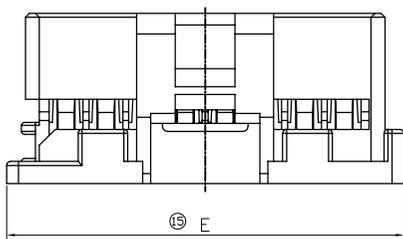


ACAD GENERATED DRAWING. DON'T CHANGE BY HAND

REV.	DATE	ECN.NO	MODIFY.CONTENT
A0	2024.05.06		初版发行




3D View

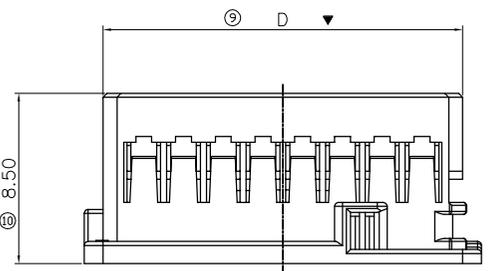

极数	尺寸				
	A	B	C	D	E
2	/	2.00	4.70	6.10	8.00
3	6.70	4.00	6.70	8.10	10.00
4	8.70	6.00	8.70	10.10	12.00
5	10.70	8.00	10.70	12.10	14.00
6	12.70	10.00	12.70	14.10	16.00
7	14.70	12.00	14.70	16.10	18.00
8	16.70	14.00	16.70	18.10	20.00
9	18.70	16.00	18.70	20.10	22.00
10	20.70	18.00	20.70	22.10	24.00
11	22.70	20.00	22.70	24.10	26.00
12	24.70	22.00	24.70	26.10	28.00
13	26.70	24.00	26.70	28.10	30.00
14	28.70	26.00	28.70	30.10	32.00
15	30.70	28.00	30.70	32.10	34.00













- Specifications:
- MATERIAL:PBT UL94 V-0 Natural
 - Electrical Characteristics:
 - APPLICABLE WIRE:AWG.#22-#26
 - Voltage rating:125V AV/DC(rms)
 - Current rating:3A AC/DC
 - Withstanding voltage:500VAC/minute
 - Insulation resistance:1000 MΩ min
 - Contact resistance:20mΩ max
 - PinRetention Force: 1Kgf/PIN MIN
 - Working Temp:-40°C~+125°C
 - Storage Temperature: -25°C~+85°C
70%R.H.Max.(No Condensation)
 - MAJOR DIMENSION:▼
 - Products meet ROHS environmental requirements

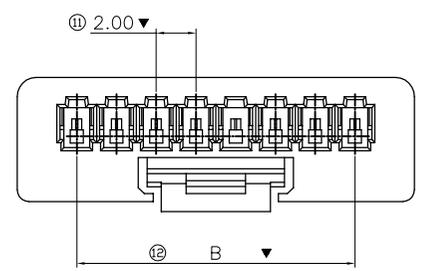

8Pin

GENERAL TOLERANCE			UNITS	NAME(INTENDED USE)	ATOM [®] 深圳市爱特姆科技有限公司 SHENZHEN ATOM TECHNOLOGY CO.,LTD.
SELECT	1	2	3	Pitch 2.0mm	
TOL.		✓		PART NO.(INTENDED USE) HO200**-42401	TITLE: Customer DRAWING FOR Housing 2.0 XP 带内扣 胶芯
ON.	1	2	3		
X.XXX	±0.10	±0.15	±0.20	FINISH	DWG NO.: ATOM-A09698
X.XX	±0.15	±0.20	±0.25		
X.X	±0.20	±0.25	±0.30	Q'TY	SCALE SHEET REV. 1:1 1/2 A0
X.	±0.25	±0.30	±0.50		
ANGLE	±2'				

ACAD GENERATED DRAWING. DON'T CHANGE BY HAND



2Pin









3Pin

4Pin

5Pin

6Pin

7Pin

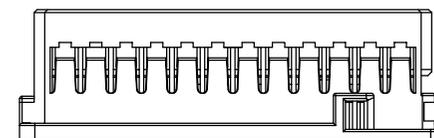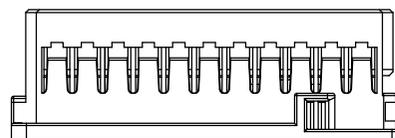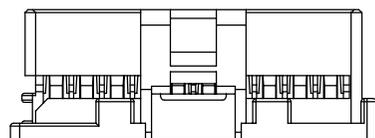







9Pin

10Pin

11Pin

12Pin

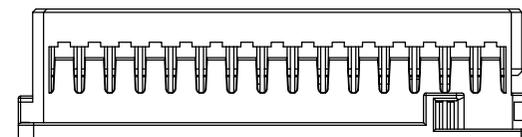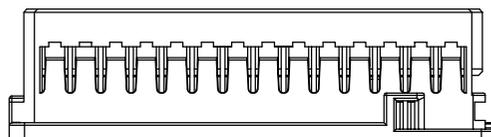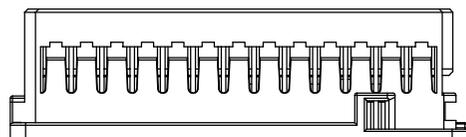

13Pin

14Pin

15Pin

PART NO.
HO200**--42401

产品代码HO:Hosing简写

产品间距:2.00mm

产品Pin位: 02-15

01: 预留码

4: 表示袋装

42: 带内扣Hosing

GENERAL TOLERANCE			UNITS	NAME(INTENDED USE)	TITLE:
SELECT	1	2	mm		
TOL.	✓			Pitch 2.0mm	ATOM ® 深圳市爱特姆科技有限公司 SHENZHEN ATOM TECHNOLOGY CO.,LTD.
ON.				PART NO.(INTENDED USE)	
X.XXX	±0.10	±0.15	±0.20	HO200**--42401	Customer DRAWING FOR Housing 2.0 XP 带内扣 胶芯
X.XX	±0.15	±0.20	±0.25	APPD:	DWG NO.:
X.X	±0.20	±0.25	±0.30	CHKD:	ATOM-A09698
X.	±0.25	±0.30	±0.50	DR: Frank	SCALE
ANGLE	±2'				1:1
					SHEET
					2/2
					REV.
					A0